

External wall section principle



Wood screw HBS 8x380
Rothoblaas HBS 8380 - 8.3 pcs/m²

Wood screw HBS 8x320
Rothoblaas HBS 8320 - 8.3 pcs/m²

Wood screw HBS 8x380
Rothoblaas HBS 8380 - 8.3 pcs/m²

$$U = 0.13 \text{ W/(m}^2\text{K)}$$

- Horizontal board cladding, 19x95 mm
- Vertical timber battens, 32x45 mm, c/c 600 mm
- Wind barrier membrane
- Wood fibre insulation board ($\lambda = 0,037 \text{ W/mK}$), 250 mm
- **Klik-Klik CLT wall system**

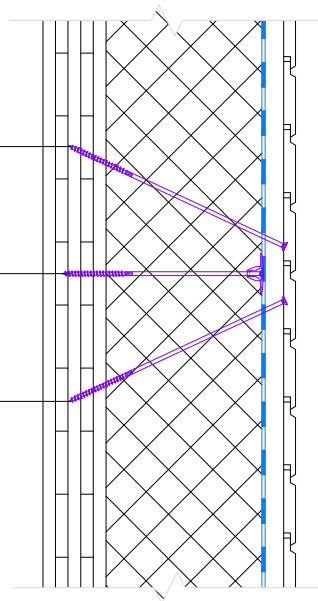

I. These drawings contain standard solutions designed by KLIK-KLIK for AutoCAD software.
These drawings are intended for architects and structural engineers to use the KLIK-KLIK Wall System..

II. The structural interface details are so-called indicative general cross sections, they do not take a position on e.g. fastenings, structural strengths, etc.
Site-specific solutions and structure types are always determined by the sites structural designer according to the sites requirements. The exact dimensions of the structural layers and the performance values of the structural layers are determined in the structure types.
Variables depending on the dimensions and performance of the structural layers are:

- Load-bearing capacity and stability of the structure
- Building physical functioning of the structure as a whole + water vapour permeability, air tightness, thermal conductivity, weather resistance of the materials
- Achievable level of thermal insulation
- Fire compartment ability (EI) and fire endurance (R) of the structure
- Fire resistance class of the materials (flammability, smoke development, flammable drops)
- Fireproofing class of the surface layers of the structure for the background structure in the event of a fire
- Sound insulation level of the structure against traffic and aircraft noise

III. Fasteners only according to the engineering project.

KLIK KLIK
BUILD FAST'N'EASY

Property and copyright belong
exclusively to the CLT FACTORY
group of companies.